


# AP0808N

## Digital Audio Processor-AP Series

8 In x 8 Out

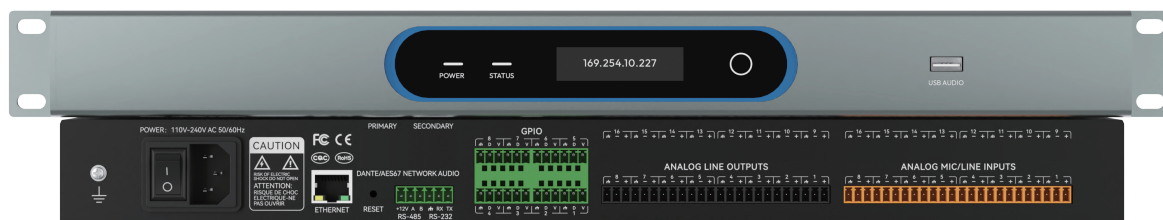

### Features

- **Open Architecture Platform:** Upgraded to a fully open architecture, the system allows modular DSP programming with drag-and-drop functionality for flexible audio signal routing and editing. Intelligent features such as one-click wiring and module alignment greatly enhance DSP programming efficiency and convenience.
- **Advanced Audio Processing:** Integrated with 8-channel AEC, ATS mixing, feedback suppression, and FIR filters, the processor delivers high-quality and stable audio processing and transmission for a variety of application scenarios.
- **Multi-Device and Scene Management:** Based on the open architecture, multiple AP-series devices can be connected online. Module settings can be copied and pasted across devices, and project files can be managed centrally. The system supports up to 999 scene presets, each with independently configurable module parameters.
- **Comprehensive Control Solutions:** Offers RS232, RS485, and UDP control options for one-click system operation. Supports wired and wireless Web access via LAN IP, allowing users to customize control interfaces according to their needs.
- **Video Conference Integration:** Built-in USB sound card ensures seamless integration with major video conferencing platforms such as Zoom and Teams, providing a convenient and high-quality audio experience.

### Specifications

|                                   |                                                      |
|-----------------------------------|------------------------------------------------------|
| Analog Input / Output Channels    | 8x8                                                  |
| Processor                         | ADI SHARC 21569@1 GHz SIMDx2                         |
| Input Gain                        | 0/3/6/9/12/15/18/21/24/27/30<br>33/36/39/42/45/48 dB |
| Phantom Power                     | 48Vmax                                               |
| Frequency Response                | 20Hz~20kHz (+0\ -0.1dB)                              |
| Maximum Level                     | +18dBu                                               |
| Sampling Rate                     | 48 kHz                                               |
| AD/DA Bit Depth                   | 24Bit                                                |
| THD+N                             | ≤0.001% (1kHz, +4dBu A-weighted)                     |
| Equivalent Noise                  | ≤-95dBu (A-weighted)                                 |
| Input Dynamic Range               | ≥113dB                                               |
| Output Dynamic Range              | ≥113dB                                               |
| Input Common Mode Rejection Ratio | > 82dB@1kHz, 0dBu                                    |
| Output Crosstalk                  | ≤-93dB@1kHz                                          |
| Input Impedance (Balanced)        | 5.4kΩ                                                |
| Output Impedance (Balanced)       | 102Ω                                                 |
| Operating Voltage                 | 110-240V AC, 50Hz/60Hz                               |
| Shipping Weight (Net / Gross)     | 2.32kg/3.23kg                                        |
| Dimensions (W × D × H)            | 482x262.5x44mm                                       |