


AD44

Dante adapter box

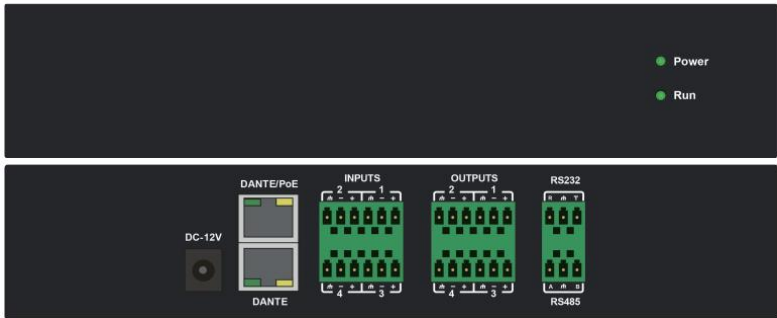

Specifications

Sampling rate/quantization bits	48K/24bit	THD+N	<-100dB @17dBu
Number of analog input and output channels	4 x 4	Dynamic range (analog channel)	110dB
		Input dynamic range	110dB
Dante channel	4x4	Output dynamic range	112dB
Input gain	0/6/12/18/24/30/36/42/48 dB	Channel isolation @1kHz	108dB
Phantom power	+48V/10mA max	Input impedance (balanced connection)	5.4KΩ
Frequency response (20~20kHz)	±0.5dB	Output impedance (balanced connection)	600Ω
Maximum level	+18dBu	Dimensions (width x depth x height)	215 x 162x 44mm
System delay	<3ms	Shipping weigh	2KG
Working power supply	DC12V/PoE 48V		