


PoE60-2 ASM

2x60W PoE Dante module

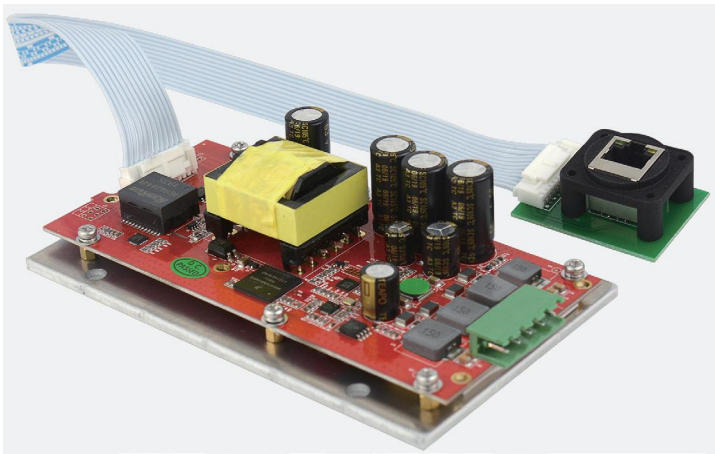

Features

- Designed to provide solutions for small and medium-sized fixed installations and commercial applications connected to the DANTE network;
- Distributed power supply and audio signal transmission are realized through a network cable, which has the characteristics of simple wiring, flexible use, and convenient management;
- It can be embedded in different types of speakers, and can be installed on walls, cabinets, under conference room tables, and in ceiling spaces for use with passive speakers;

Specifications

Connector	1RJ-45 Dante™, Cat-6, 5-Pin Euroblock Phoenix	Noise floor	<200uV
		System efficiency	>76%
Maximum power	2x 30W/8Ω; 2x60W/4Ω (Peak Power)	Protection functions	overcurrent protection; high temperature protection; overload protection
Transmission rate	100M/1000M bps		
Frequency response range	20Hz-20kHz	Heat dissipation method	natural convection heat dissipation
Total harmonic distortion	<0.30% >100dB	Signal-to-noise ratio	>100dB