


PoE Pendant Speaker

PSS-6.5B

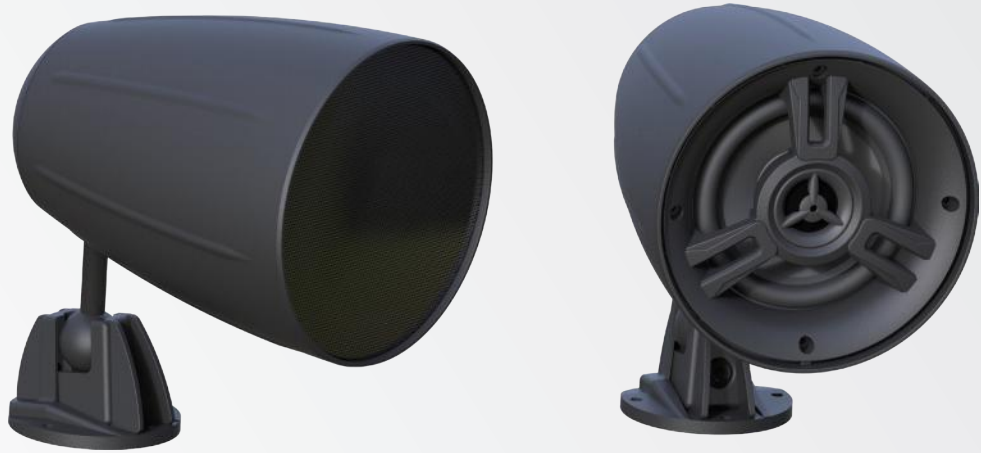

Features

- 1 Three flexible installation methods are available: wire hanging, wall mounted, and ground insertion.
- 2 Can be used in harsh environments such as rain, salt spray, and high temperatures.
- 3 Suitable for sky amplification in spaces without suspended ceilings.

Pendant speaker is a speaker that supports PoE power supply for multi-purpose and diversified installation. The installation kit can be optionally equipped with lawn installation methods and indoor and outdoor wall mounted installation accessories. The speaker unit design adopts injection molded polypropylene material, which has been tested and can be used in harsh environments such as rain, salt spray, and high temperature. Installing speakers at the top of building spaces has the characteristics of wide application coverage, high efficiency, easy installation, and excellent performance in music or vocal range.

Specification

Power Input	802.3af/802.3at/802.3bt compatible, it is recommended to use the 802.3bt standard
Support Dante protocol	
Built in DSP Processing	
Tweeter	1-inch rotating silk dome
Bass	6.5-inch injection molded polypropylene cone basin
Impedance	8 Ω
Rated Power (8 Ω)	60 W
Sensitivity	89dB 1M\1W
Frequency Response	75Hz-20kHz
Net Weight	2.85kg
Dimensions	209.9x292.8mm

PoE Pendant Speaker

PSS-6.5W



Features

- 1 Three flexible installation methods are available: wire hanging, wall mounted, and ground insertion.
- 2 Can be used in harsh environments such as rain, salt spray, and high temperatures.
- 3 Suitable for sky amplification in spaces without suspended ceilings.

Pendant speaker is a speaker that supports PoE power supply for multi-purpose and diversified installation. The installation kit can be optionally equipped with lawn installation methods and indoor and outdoor wall mounted installation accessories. The speaker unit design adopts injection molded polypropylene material, which has been tested and can be used in harsh environments such as rain, salt spray, and high temperature. Installing speakers at the top of building spaces has the characteristics of wide application coverage, high efficiency, easy installation, and excellent performance in music or vocal range.

Specification

Power Input	802.3af/802.3at/802.3bt compatible, it is recommended to use the 802.3bt standard
Support Dante protocol	
Built in DSP Processing	
Tweeter	1-inch rotating silk dome
Bass	6.5-inch injection molded polypropylene cone basin
Impedance	8 Ω
Rated Power (8 Ω)	60 W
Sensitivity	89dB 1M\1W
Frequency Response	75Hz-20kHz
Net Weight	2.85kg
Dimensions	209.9x292.8mm