


# NLP6464D

64x64 Digital Audio Processor (Dante)

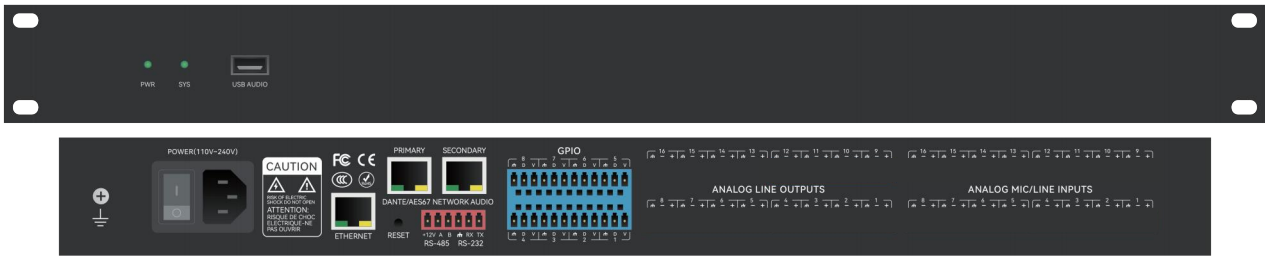

## Features

- Each channel has its own independent notch feedback suppression which can find and suppress audio feedback automatically.
- Provides up to 16 presets, each can work independently.
- Supports audio channel duplicating, linking, and grouping.
- Supports RS-232 and UDP central control.
- Provides the flexibility to assign UDP port number, with the control commands available through the control software.
- Works with wall panel products, both software programmable.
- User Interface supports iOS, Android and Windows operating system.

## Specifications

Processor	ADI SHARC 21489 x 2	Frequency response	20Hz~20kHz (±0.3dB)
Sampling rate/quantization bits	48kHz/24bit	System latency	6ms
Number of analog input and output channels	/	Working power supply	110-240VAC 50/60Hz
		Dimensions (width x depth x height)	482x259x45mm
Number of DANTE input and output channels	64x64	Shipping Weight (Net/Gross Weight)	3.20kg/3.59kg